



GEOTECHNICAL DRILL RIGS



Introducing the Fraste Geotechnical Lineup available through Rig Source! Proven over 60 years and battle-tested in some of the most difficult drilling environments around the world, these rigs offer unparalleled flexibility and the kind of reliability you expect from a fully hydraulic system. Efficiency comes naturally with features such as a floating spindle design, double rod clamp, long stroke feed options, and rod centering guide rollers. With various head torque and speed combinations, there's guaranteed to be a rig to meet your specific needs:



MULTIDRILL SL

- » **Tower Height:**
16.7'
- » **L x W x H (Stowed):**
16.2' x 4' x 7.5'
- » **Weight:**
6,613 lbs
- » **Max Head Torque:**
3,319 ft lb
- » **Max Head Speed:**
900 rpm
- » **Rotary Head Stroke:**
5.9 - 9.2 ft

MULTIDRILL PL-G

- » **Tower Height:**
22.6'
- » **L x W x H (Stowed):**
17.9' x 6.6' x 8.7'
- » **Weight:**
11,023 lbs
- » **Max Head Torque:**
4,204 ft lb
- » **Max Head Speed:**
1,000 rpm
- » **Rotary Head Stroke:**
11.5 ft

MULTIDRILL ML

- » **Tower Height:**
29.2'
- » **L x W x H (Stowed):**
20.3' x 7.2' x 9'
- » **Weight:**
16,534 lbs
- » **Max Head Torque:**
7,375 ft lb
- » **Max Head Speed:**
950 rpm
- » **Rotary Head Stroke:**
11.5 ft


MULTIDRILL XL-140

- » **Tower Height:**
32'
- » **L x W x H (Stowed):**
24' x 6.6' x 10.3'
- » **Weight:**
26,455 lbs
- » **Max Head Torque:**
11,506 ft lb
- » **Max Head Speed:**
910 rpm
- » **Rotary Head Stroke:**
12.1 ft





GEOTECHNICAL DRILL RIGS

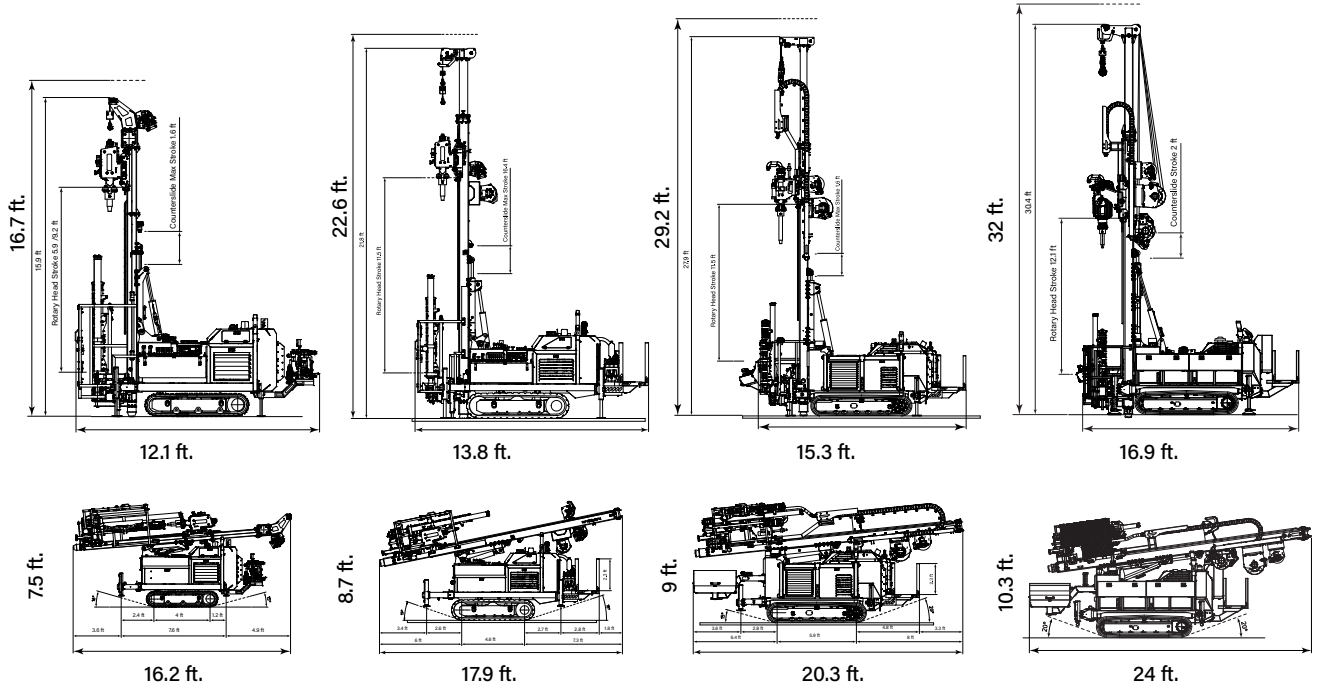

MULTIDRILL SL

MULTIDRILL PL-G

MULTIDRILL ML

MULTIDRILL XL-140

Diesel Engine
Rotary Head Stroke
Pull-up
Pull-down
Max Head Torque
Max Head Speed
Clamp Diameter
Weight

CAT C1.7, 48 Hp

CAT C2.2, 74 Hp

CAT C3.6, 120 Hp

CAT C4.4, 148 Hp

5.9 - 9.2 ft

11.5 ft

11.5 ft

12.1 ft

5,620 lbf

8,992 lbf

13,488 lbf

22,480 lbf

5,620 lbf

8,992 lbf

6,970 lbf

15,287 lbf

3,319 ft lb

4,204 ft lb

7,375 ft lb

11,506 ft lb

900 rpm

1,000 rpm

950 rpm

910 rpm

1.9 - 8.3 in

1.6 - 9.9 in

1.6 - 10 in

2.3 - 14 in

6,613 lbs

11,023 lbs

16,534 lbs

26,455 lbs



rigsourceinc.com | info@rigsourceinc.com | 630.365.1649